


HY17M24-DS01


HY17M24 Starter Kit

Characteristics

- HY10000-CM01(HY-Dongle) communication with HY17M24-AM03 by I2C or UART interface
- HY-Dongle support 3.3V power output
- HY-Dongle support ISP Bootloader Function (In system programming)
- HY17M24-AM03 with pressure sensor, output ADC raw data by UART interface
- No need USB cable to communication with PC to evaluate HY17M24 ADC performance

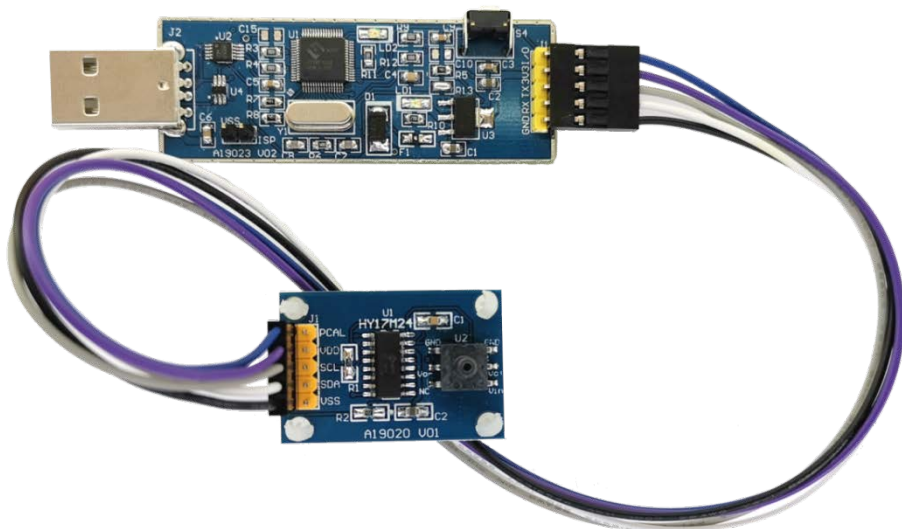


Block Diagram

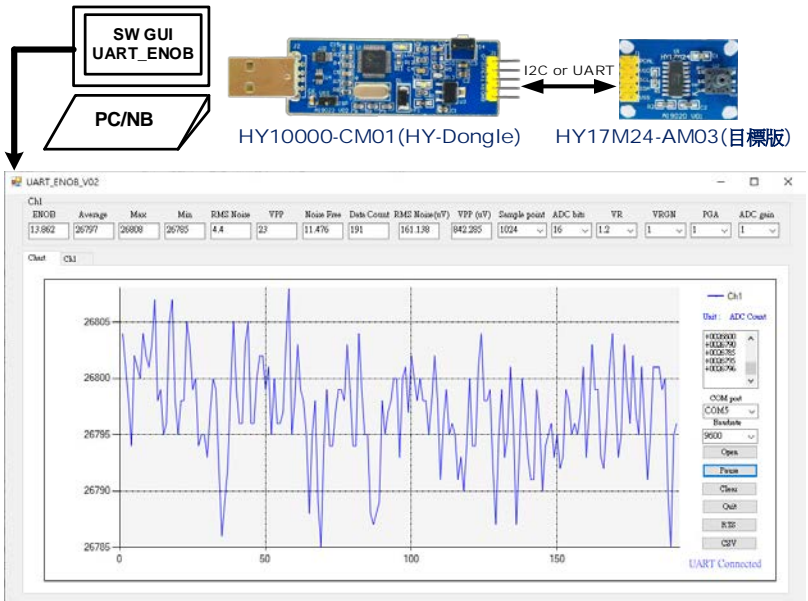

Packaging Contents

HY17M24-DS01

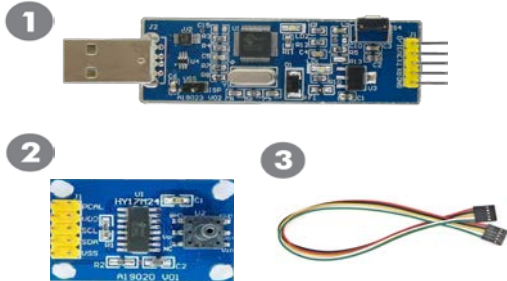

No.	Model No.	Description
1	HY10000-CM01	HY-Dongle Board
2	HY17M24-AM03	HY17M24 Demo Board
3	Interface line	5pin to 5pin (2.54mm pitch)

Supported Model : HY17M24 Series